



Vlastnosti




- Perdea de aer cu pomp? de aer economisitoare de energie: Reducere cu pân? la 70% a costurilor ?i emisiilor de CO2 (în modul de înc?lzire).
- Carcas? autoportant? f?cut? din plac? de o?el galvanizat, gata de instalare încastrat? în tavan fals.
- Gril? de admisie (f?r? mentenan??) f?cut? din profile de aluminiu ?i duz? de evacuare integrat? de culoare alb? RAL 9016.Alte culori sunt disponibile la cerere.Prefiltru intern inclus.
- Palete de evacuare din aluminiu anodizat, cu form? aerodinamic?, ajustabile în ambele direc?ii.
- Ventilatoare centrifugale cu dubl? admisie, alimentate de motor extern cu rotor ?i cu zgomot redus. Selector de 5 viteze.Modele EC asamblate cu ventilatoare eficiente cu consum redus.
- Prefiltru intern inclus.
- Advanced Plug&Play control. Includes: Advanced PRO control with integrated LCD screen, door contact, 7m RJ11 cable and remote control. With integrated functions: door delay (configurable); operation, alarm and maintenance warning signals; and multiple digital inputs that modify the curtain's operation.
- Includes protective varnish for the electronic board and control.
- DX VRF:

Specificace

50Hz

Rozm?ry

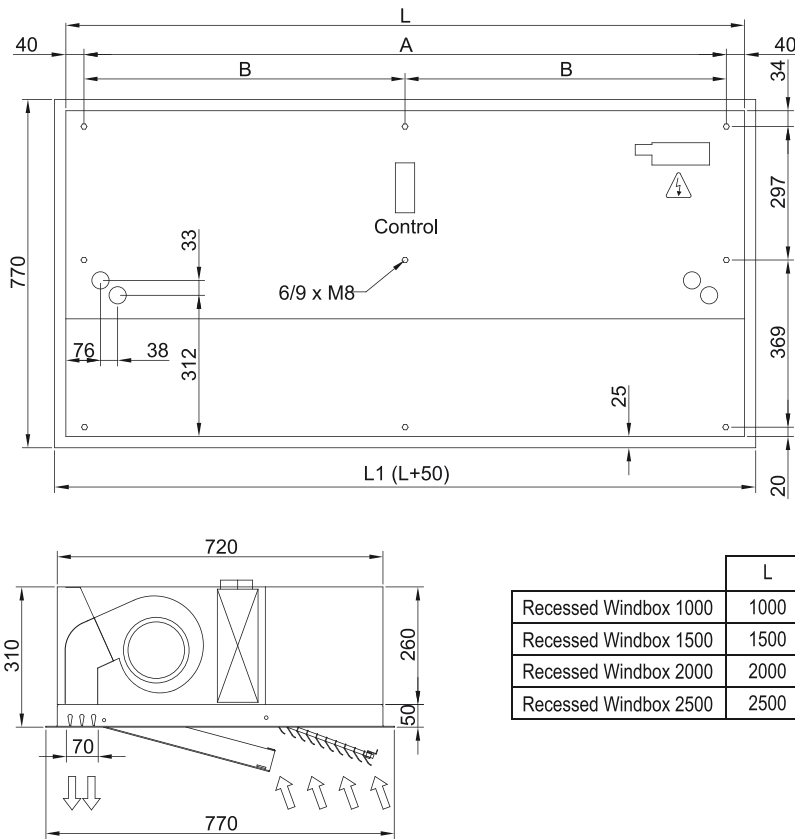

|                       | L    | L1   | A    | B    |
|-----------------------|------|------|------|------|
| Recessed Windbox 1000 | 1000 | 1050 | 920  | -    |
| Recessed Windbox 1500 | 1500 | 1550 | 1420 | 710  |
| Recessed Windbox 2000 | 2000 | 2050 | 1920 | 960  |
| Recessed Windbox 2500 | 2500 | 2550 | 2420 | 1210 |